


BOARD OF COMMISSIONERS

JANICE VAN NESS, CHAIR & CEO
Tuwanya C. Smith, Commissioner Post I
Dr. Doreen Williams, Commissioner Post II

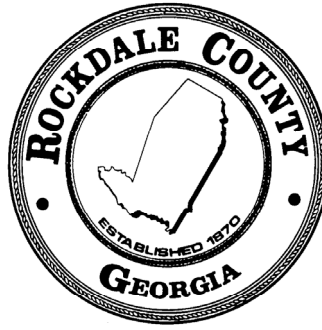

DEPARTMENT OF FINANCE

SUE SANDERS, INTERIM CFO
TELEPHONE: 770-278-7555
FACSIMILE: 770- 278-8910

Addendum No. 2

**ITB No. 25-16
SPLOST 5C RESURFACING PROGRAM**

June 18, 2025

ITB #25-16 is hereby amended as follows:

1. Below are questions received and corresponding answers:

A. Question: On Page 53, scope of work per street, it looks like all streets are getting milled 3.5" and then getting 2" of 19mm and 2" of 12.5mm. However, the bid schedule does not seem to reflect this. Can you please provide clarity on what the scope of work is?

Answer: 3.5' milled with 2" of 19mm and 1.5" of 12.5mm is the expected depth for this project. Any variations will be approved by Rockdale County DOT engineering representative.

B. Question: The roads on the detail page 118 show a list of roads that do not look to be on this project. Can you clarify if they are on the project or not?

Answer: Roads names have been removed. See attached.

C. Question: On the detail page 118, the detail shows mill @ 3.5", then 2" 19mm and 1.5" of 12.5mm. Is this the correct specification?

Answer: This question will be addressed during the pre-bid conference.

D. Question: Will the city accept LASA in lieu of Hydrated Lime per the attached GDOT Bulletin?

Answer: RDOT accepts GDOT-approved BMPs. Please provide the documentation for RDOT review.

E. Question: Is the shoulder grading by the linear mile of roadway or linear mile of shoulder?

Answer: Measurement by linear mile of shoulder is acceptable.


2. All other conditions remain in full force and effect.

BOARD OF COMMISSIONERS

JANICE VAN NESS, CHAIR & CEO

Tuwanya C. Smith, Commissioner Post I

Dr. Doreen Williams, Commissioner Post II

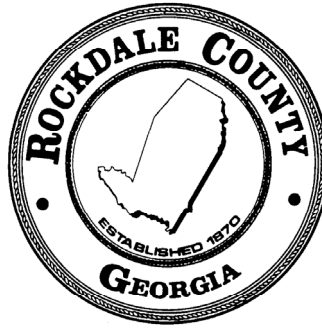

DEPARTMENT OF FINANCE

SUE SANDERS, INTERIM CFO

TELEPHONE: 770-278-7555

FACSIMILE: 770- 278-8910

3. If a bid has been submitted and anything in this Addendum causes the bidder to change the item offered or to increase or decrease the bid price, the new price and/or changes will be inserted below:


4. All bidders under this Invitation to Bid are kindly requested to acknowledge receipt of this Addendum on page BD.26 of the Bid Package.

Tina Malone

Tina Malone, CPPB CPPO

Procurement Manager

Department of Finance, Purchasing Division

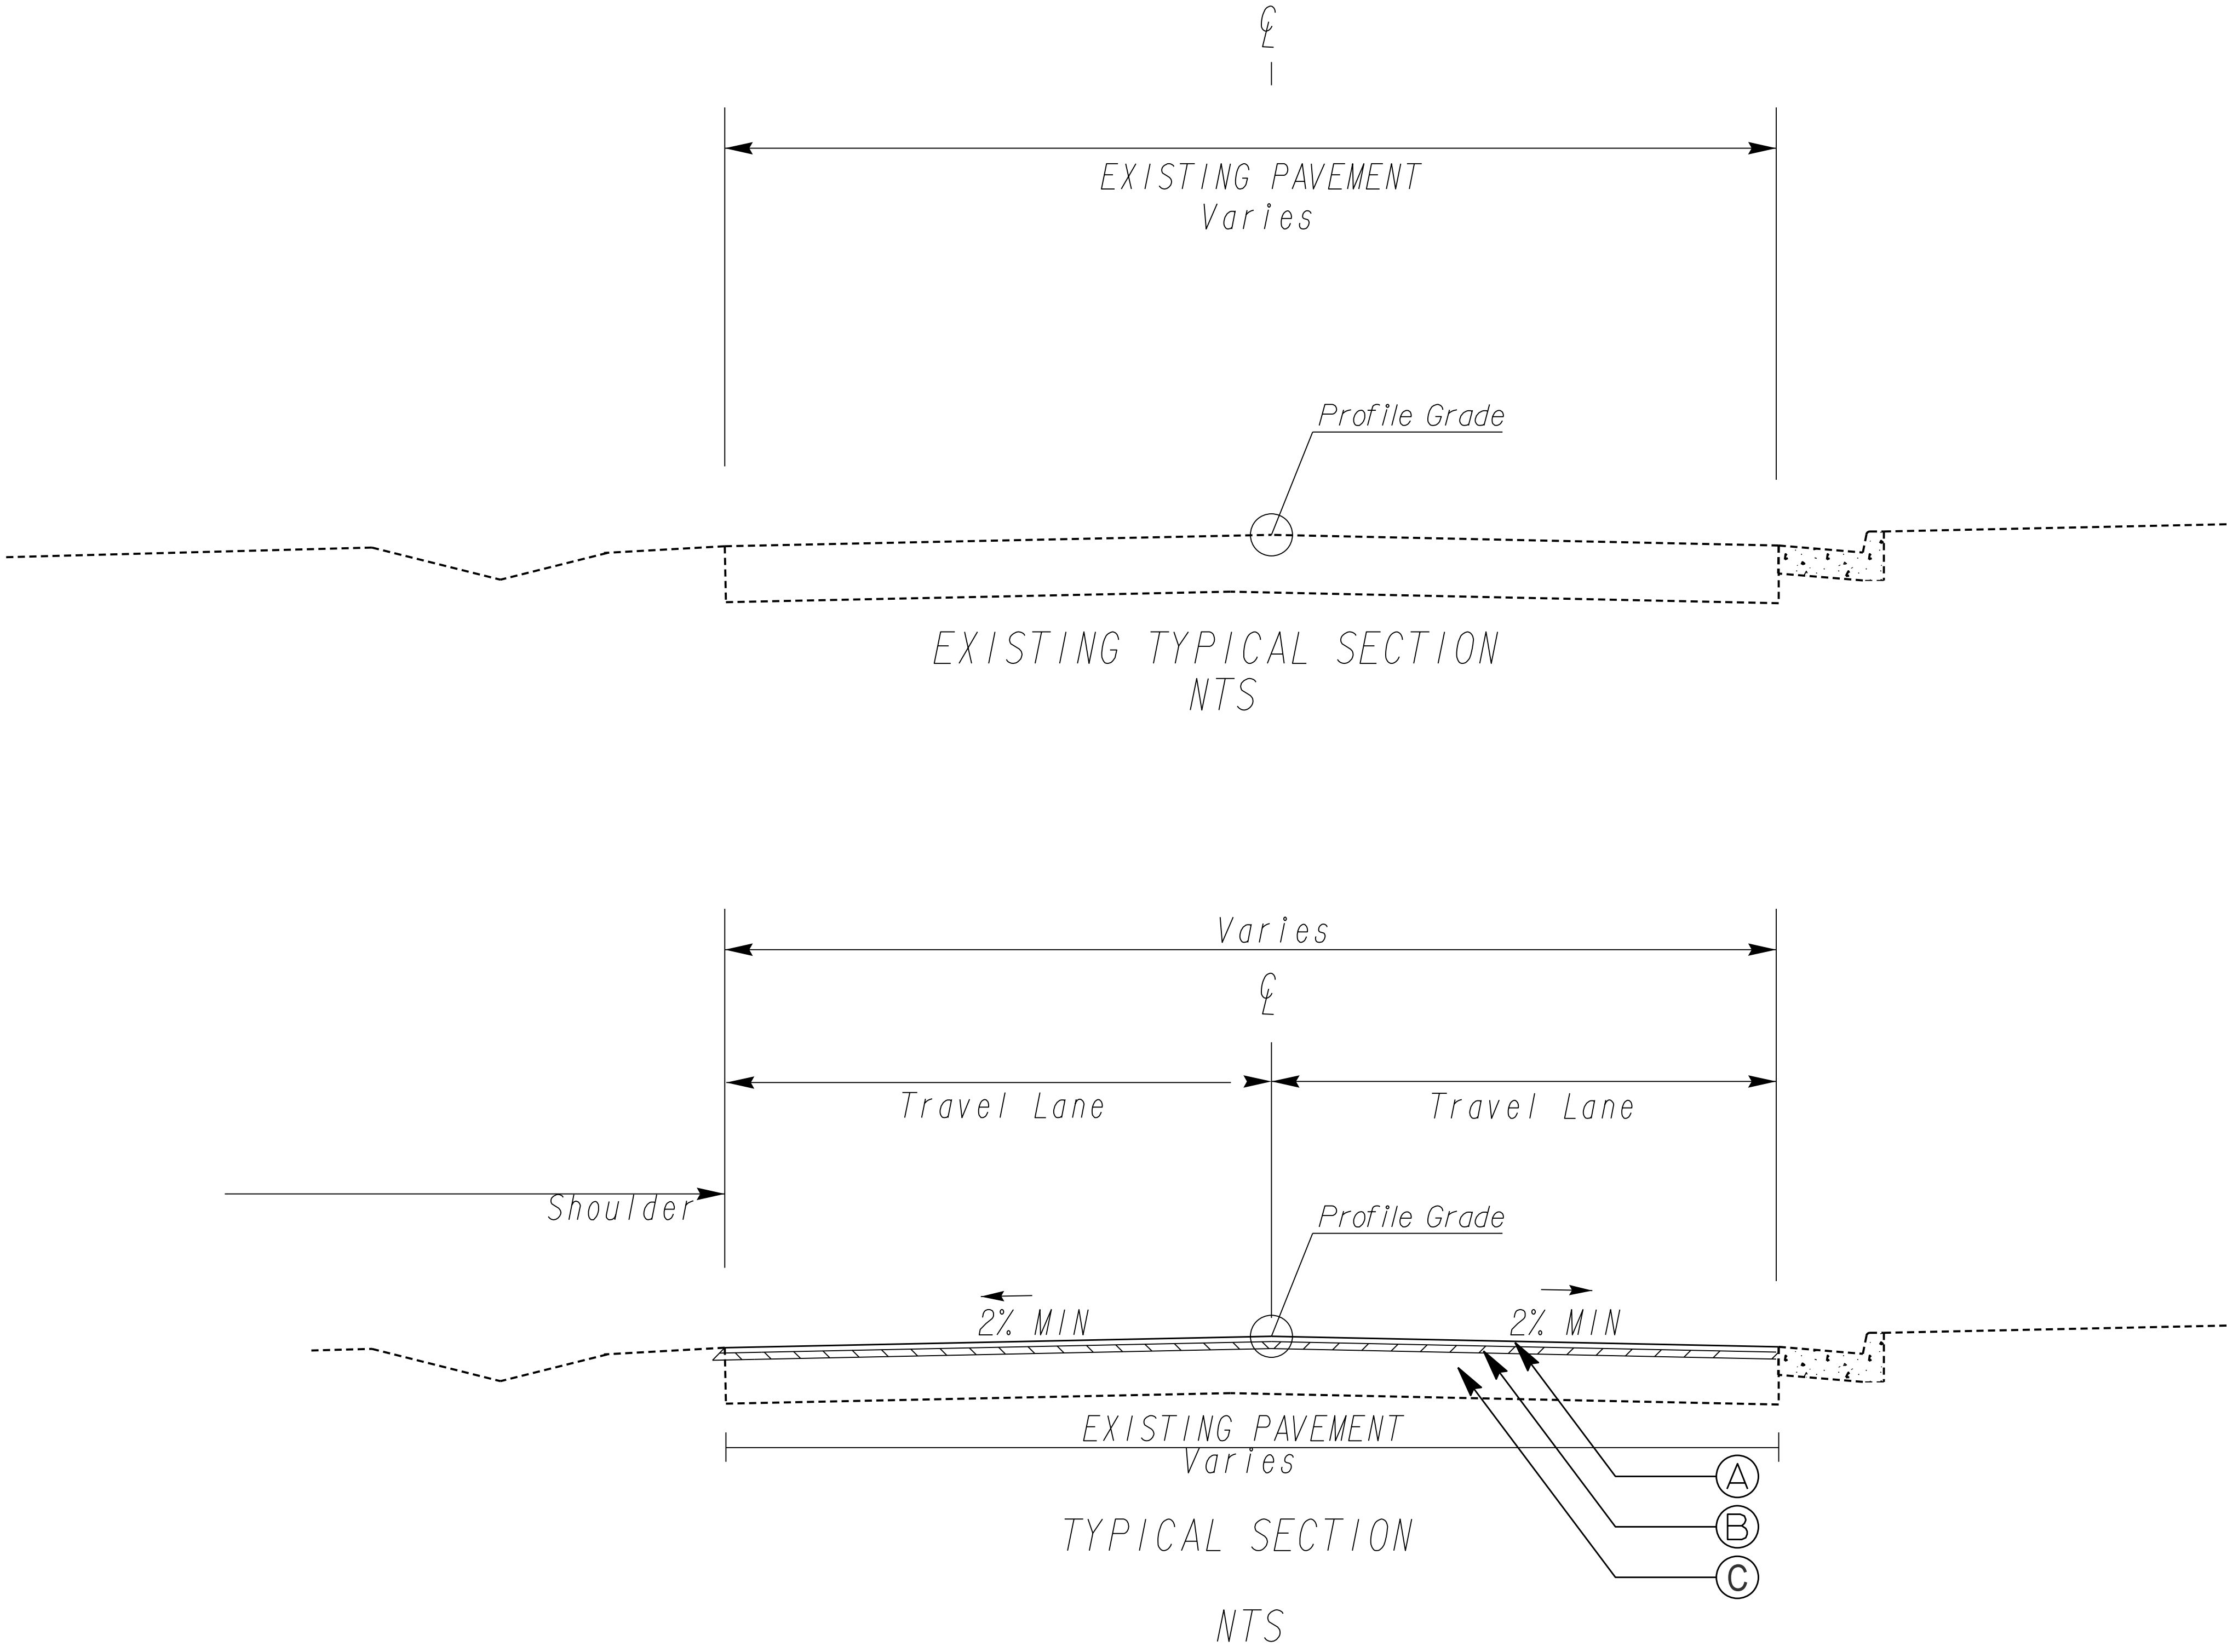

NOTE:

1. MILL ASPH CONC PVMT, 3 1/2 IN DEPTH (FULL WIDTH)
2.

- Ⓐ RECYCLED ASPH CONC 12.5MM SUPERPAVE. GP 2 ONLY, INCL BITUM MATL & H LIME (165 LBS/SY)/1½"
- Ⓑ RECYCLED ASPH CONC 19MM SUPERPAVE. GP 1 OR 2, INCL BITUM MATL & H LIME (220 LBS/SY)/2"
- Ⓒ GR AGGR BASE CRS, 6 INCH, INCL MATL (USED FOR PATCHING, AS REQUIRED)

			DATE	REVISIONS	DATE	REVISIONS	TYPICAL SECTIONS MAJOR ROADS